

6UZ1


20

300-400

EIDSS



EIDSS

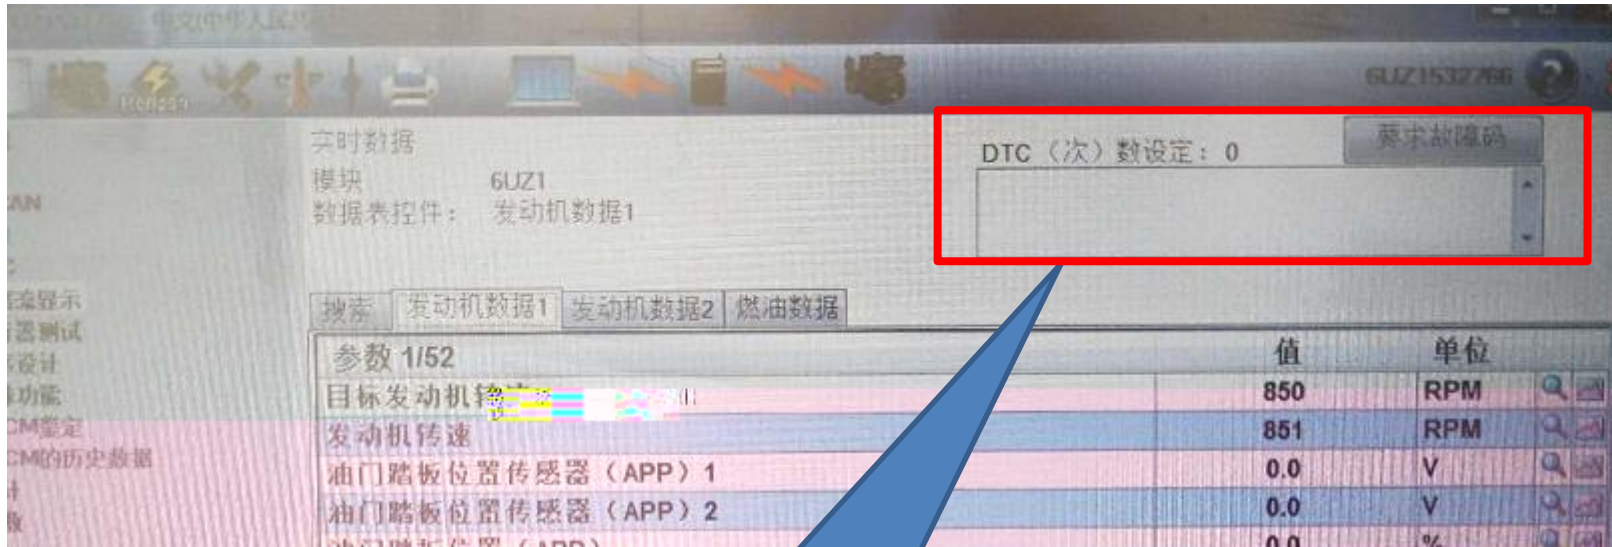

1

EIDSS

2

6 导

1-2导

3



4
排

所号

排
初

5

6

7

6 导

48KPA

100KPA

时间	13:41.7	13:41.9	13:42.1	13:42.4	13:42.6	13:42.9	13:43.1	13:43.3	13:43.6
气压 Kpa	48	48	48	48	47	48	48	48	48

8

120KPA

100KPA

SW

ON

5V 0V 0V.

排

进气温度传感器	1.9	V
进气温度	30.0	°C
歧管温度传感器5V	4.0	V
歧管温度	130	°C
燃油温度传感器	1.5	V
材料温度		




9

10

ECM

初

5V

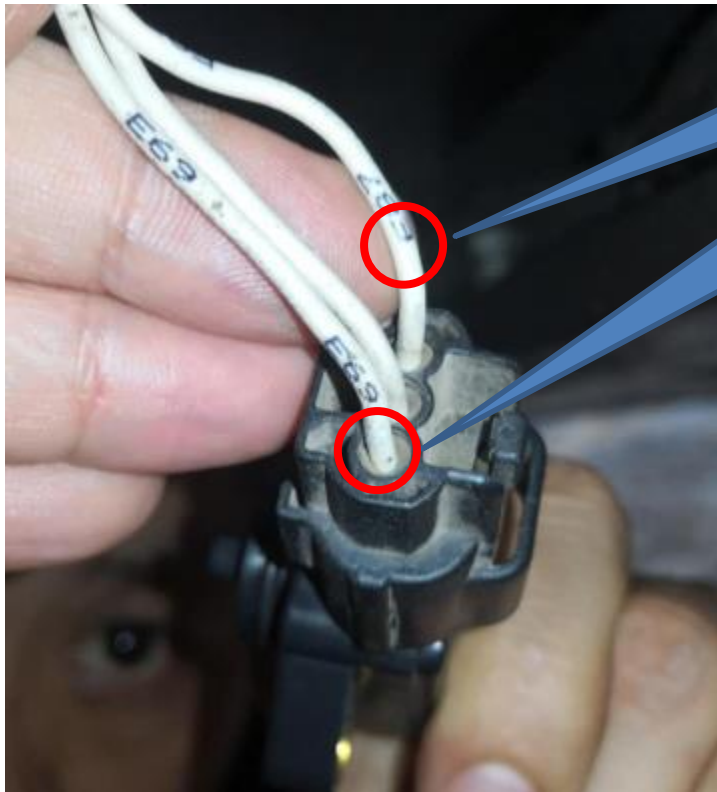

排